



HEIDENHAIN

SALES & SERVICE:

A Tech Authority, Inc.
13745 Stockton Ave.
Chino CA 91710
909-614-4522
sales@atechauthority.com



Product Information

ECN 1313
EQN 1325
ECN 1325
EQN 1337


Absolute Rotary Encoders
with Tapered Shaft

ID 768295-xx
ID 1178020-xx
ID 827039-xx
ID 1178019-xx

ECN/EQN 1300 series

Absolute rotary encoders

- 06 stator coupling for axial mounting
- 65B tapered shaft

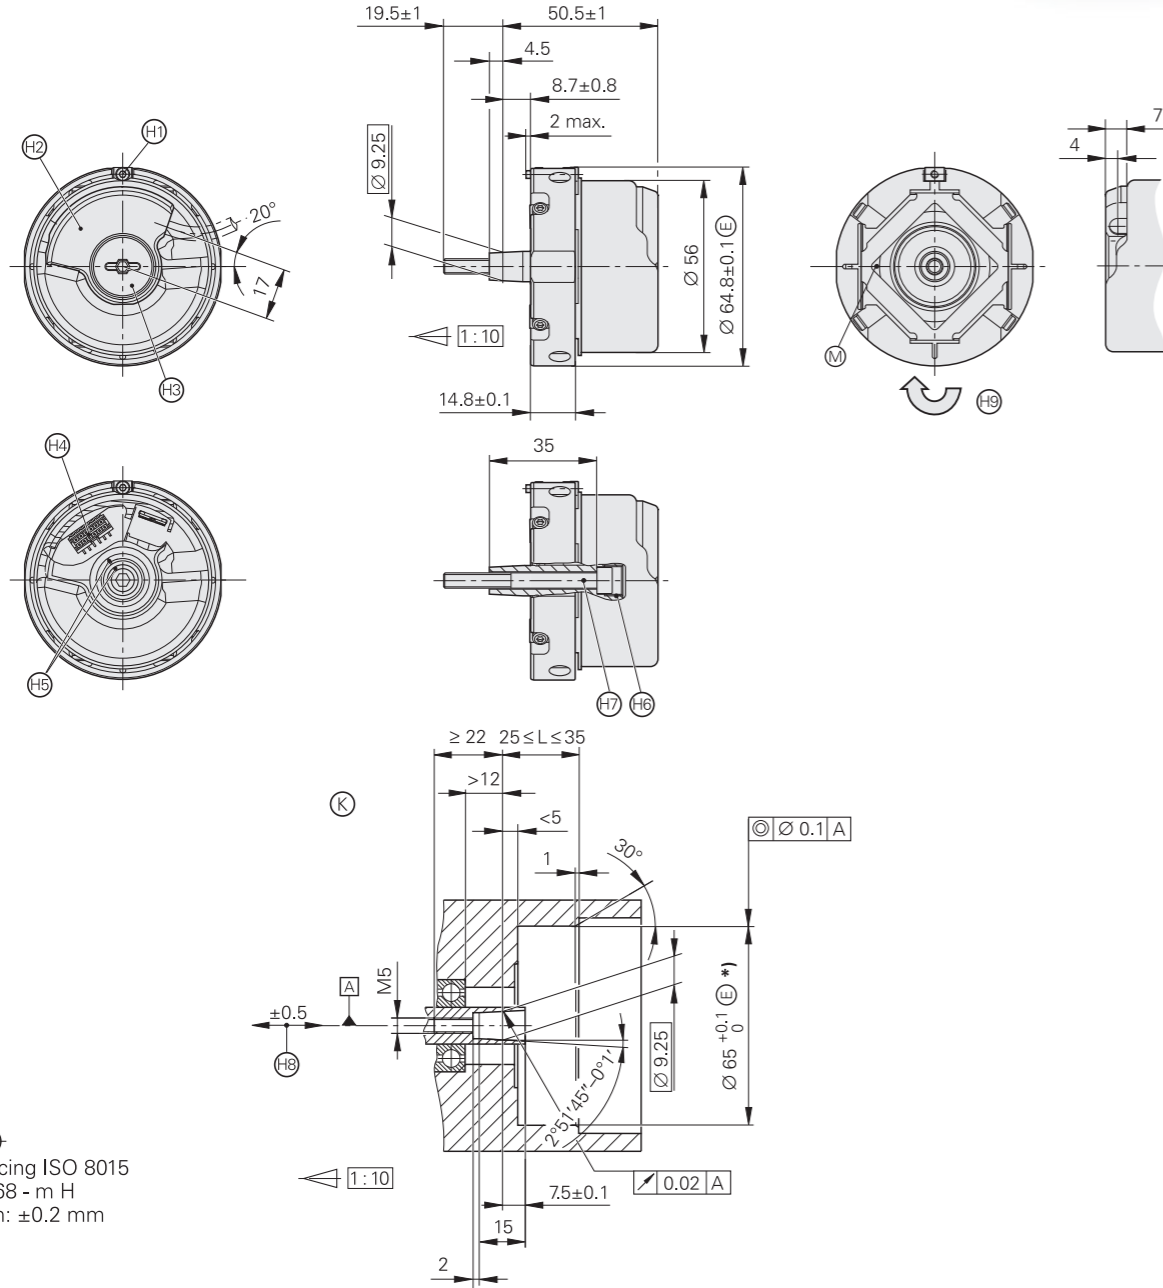

mm
 Tolerancing ISO 8015
 ISO 2768 - m H
 < 6 mm: ±0.2 mm

- = Bearing of mating shaft
- ⊙ = Required mating dimensions
- ⊗ = Measuring point for operating temperature
- 1 = Clamping screw for coupling ring: width A/F 2; tightening torque: 1.25 Nm -0.2 Nm
- 2 = Die-cast cover
- 3 = Screw plug: widths A/F 3 and 4; tightening torque: 5 Nm +0.5 Nm
- 4 = ECN/EQN: 12-pin PCB connector
 ECN/EQN: 14-pin + 4-pin PCB connector
- 5 = ECN/EQN: zero position of shaft and housing
- 6 = M10 back-off thread
- 7 = Self-locking screw: DIN 6912 M5x50; width A/F 4; tightening torque: 5 Nm +0.5 Nm
- 8 = Compensation of mounting tolerances and thermal expansion; no dynamic movement permitted
- 9 = Direction of shaft rotation for ascending position values

	Absolute			
	ECN 1313	ECN 1325	EQN 1325	EQN 1337
Interface	EnDat 2.2			
Ordering designation	EnDat01	EnDat22	EnDat01	EnDat22
Position values per rev.	8192 (13 bits)	33554432 (25 bits)	8192 (13 bits)	33554432 (25 bits)
Revolutions	-		4096 (12 bits)	
Elec. perm. shaft speed/ deviations ²⁾	512 lines: 5000 rpm/±1 LSB 12000 rpm/±100 LSB 2048 lines: 1500 rpm/±1 LSB 12000 rpm/±50 LSB	15000 rpm (for continuous position values)	512 lines: 5000 rpm/±1 LSB 12000 rpm/±100 LSB 2048 lines: 1500 rpm/±1 LSB 12000 rpm/±50 LSB	15000 rpm (for continuous position values)
Calculation time t_{cal} Clock frequency	≤ 9 μs ≤ 2 MHz	≤ 7 μs ≤ 8 MHz	≤ 9 μs ≤ 2 MHz	≤ 7 μs ≤ 8 MHz
Incremental signals	~ 1 V _{PP} ¹⁾	-	~ 1 V _{PP} ¹⁾	-
Line count*	512 2048	2048	512 2048	2048
Cutoff frequency -3 dB	2048 lines: ≥ 400 kHz 512 lines: ≥ 130 kHz	-	2048 lines: ≥ 400 kHz 512 lines: ≥ 130 kHz	-
System accuracy	512 lines: ±60"; 2048 lines: ±20"			
Electrical connection	12-pin	16-pin with connection for temperature sensor ³⁾	12-pin	16-pin with connection for temperature sensor ³⁾
Supply voltage	DC 3.6 V to 14 V			
Power consumption (maximum)	3.6 V: ≤ 0.6 W 14 V: ≤ 0.7 W		3.6 V: ≤ 0.7 W 14 V: ≤ 0.8 W	
Current consumption (typical)	5 V: 85 mA (without load)		5 V: 105 mA (without load)	
Shaft	Tapered shaft (Ø 9.25 mm); taper: 1:10			
Mech. perm. shaft speed n	≤ 15000 rpm		≤ 12000 rpm	
Starting torque (typical)	0.01 Nm (at 20 °C)			
Moment of inertia of rotor	2.6 · 10 ⁻⁶ kgm ²			
Natural frequency f_N (typical)	1800 Hz			
Permissible axial motion of measured shaft	±0.5 mm			
Vibration 55 Hz to 2000 Hz Shock 6 ms	≤ 300 m/s ² ⁴⁾ (EN 60068-2-6) ≤ 2000 m/s ² (EN 60068-2-27)			
Operating temperature	-40 °C to 115 °C			
Protection EN 60529	IP40 when mounted			
Mass	≈ 0.25 kg			
ID number	768295-xx	1178019-xx	827039-xx	1178020-xx


* Please select when ordering

- ¹⁾ Deviating tolerances
- | | |
|-----------------------------|--|
| Signal amplitude: | 0.8 V _{PP} to 1.2 V _{PP} |
| Asymmetry: | 0.05 |
| Amplitude ratio: | 0.9 to 1.1 |
| Phase angle: | 90° elec. ±5° elec. |
| Signal-to-noise ratio E, F: | ≥ 100 mV |

- ²⁾ Speed-dependent deviations between absolute and incremental signals
- ³⁾ Evaluation optimized for KTY 84-130
- ⁴⁾ Valid as per standard at room temp.; the following applies at operating temps. up to 100 °C: ≤ 300 m/s²; up to 115 °C: ≤ 150 m/s²

Mounting

The tapered shaft of the rotary encoder is pressed onto the measured shaft and fastened with a central screw. The stator coupling is clamped by means of an axially tightenable screw in a location hole.

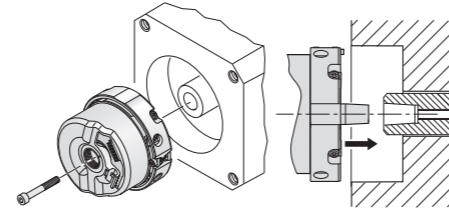

Mounting accessories

Mounting aid

To avoid damage to the cable, use the mounting aid to connect and disconnect the cable assembly. The pulling force must be applied solely to the connector and not to the wires.

ID 1075573-01

For more mounting information and mounting aids, see the **Mounting Instructions** and the *Encoders for Servo Drives* brochure. The mounting quality can be inspected with the PWM 21 and ATS software.



Electrical connection: cables

Output cables for ECN 1313/EQN 1325 with EnDat01

EPG output cables inside the motor housing \varnothing 4.5 mm (with shield crimp \varnothing 6.1 mm); [16 \times 0.057 mm ²] and TPE wires 2 \times 0.25 mm ² for temperature sensor		
With 12-pin PCB connector and 17-pin M23 angle flange socket (male)		ID 332201-xx
With 12-pin PCB connector and unstripped cable end		ID 332202-xx

Output cables for ECN 1325/EQN 1337 with EnDat22













EPG output cables inside the motor housing \varnothing 3.7 mm (with shield crimp \varnothing 6.1 mm); [1 \times (4 \times 0.06 mm ²) + 4 \times 0.06 mm ²] and TPE wires 2 \times 0.16 mm ² for temperature sensor		
With 16-pin PCB connector and 9-pin M23 SpeedTEC angle flange socket (male)		ID 1120948-xx
With 16-pin PCB connector and stripped cable end		ID 1143830-xx

Comply with the EMC requirements under "General electrical information" in the *Interfaces of HEIDENHAIN Encoders* brochure

SpeedTEC is a registered trademark of TE Connectivity Industrial GmbH.

Electrical connection

EnDat22 pin layout

8-pin M12 coupling or flange socket		9-pin M23 SpeedTEC angle flange socket									
											
											
16-pin PCB connector											
											
	Power supply				Serial data transmission				Other signals ¹⁾		
	M12	8	2	5	1	3	4	7	6	/	/
	M23	3	7	4	8	5	6	1	2	/	/
	16	1b	6a	4b	3a	6b	1a	2b	5a	8a	8b
		U_P	Sensor U_P	0V	Sensor 0V	DATA	$\overline{\text{DATA}}$	CLOCK	$\overline{\text{CLOCK}}$	T_+ ²⁾	T_- ²⁾
		Brown/ Green	Blue	White/ Green	White	Gray	Pink	Violet	Yellow	Brown	Green

¹⁾ Only for adapter cables inside the motor housing

²⁾ Connections for external temperature sensor; evaluation optimized for KTY 84-130 (see *Temperature measurement in motors* in the *Encoders for Servo Drives* brochure)

Cable shield connected to housing; U_P = Power supply voltage; T = Temperature

Sensor: The sense line is connected in the encoder with the corresponding power line.















Vacant pins or wires must not be used!

Note for safety-related applications: Only completely assembled HEIDENHAIN cables are qualified.

Do not modify cables or exchange their connectors without first consulting with HEIDENHAIN Traunreut.

SpeedTEC is a registered trademark of TE Connectivity Industrial GmbH.

EnDat01 pin layout

17-pin M23 coupling or flange socket					12-pin PCB connector								
													
	Power supply				Incremental signals ¹⁾				Serial data transmission				
	7	1	10	4	11	15	16	12	13	14	17	8	9
	1b	6a	4b	3a	/	2a	5b	4a	3b	6b	1a	2b	5a
	U_P	Sensor U_P	0V	Sensor 0V	Internal shield	A+	A-	B+	B-	DATA	$\overline{\text{DATA}}$	CLOCK	$\overline{\text{CLOCK}}$
	Brown/ Green	Blue	White/ Green	White	/	Green/ Black	Yellow/ Black	Blue/ Black	Red/ Black	Gray	Pink	Violet	Yellow
	Other signals												
	5	6											
	/	/											
	T_+ ²⁾	T_- ²⁾											
	Brown ²⁾	White ²⁾											

Cable shield connected with housing; U_P = Power supply voltage; T = Temperature

Sensor: The sense line is connected in the encoder with the corresponding power line.

Vacant pins or wires must not be used!

¹⁾ Only with the EnDat01 ordering designation

²⁾ Connections for an external temperature sensor (only for output cables inside the motor, see *Temperature measurement in motors*); if used, please refer to the information about electromagnetic compatibility in the *General electrical information* section of the *Interfaces of HEIDENHAIN Encoders* brochure.

HEIDENHAIN

DR. JOHANNES HEIDENHAIN GmbH

Dr.-Johannes-Heidenhain-Straße 5

83301 Traunreut, Germany

☎ +49 8669 31-0

☎ +49 8669 32-5061

E-mail: info@heidenhain.de

www.heidenhain.de

This Product Information document supersedes all previous editions, which thereby become invalid. The basis for ordering from HEIDENHAIN is always the Product Information document edition valid when the order is placed.

More information:

Comply with the requirements described in the following documents to ensure correct and intended operation:

- Brochure: *Encoders for Servo Drives* 208922-xx
- Brochure: *Cables and Connectors* 1206103-xx
- Brochure: *Interfaces of HEIDENHAIN Encoders* 1078628-xx
- Mounting Instructions: *ECN 1313, EQN 1325, ECN 1325, EQN 1337* 1139530-xx