

LM10 linear magnetic encoder system

EMC compliance



The LM10 encoder system conforms to the relevant harmonised European standards for electromagnetic compatibility as detailed below.

BS EN 61326

Patents

Features of RLS's encoder systems and similar products are the subjects of the following patents and patent applications:

| | |
|--------------|--------------|
| GB 0720972.9 | EP 0514081 |
| EP 0388453 | US 5,241,173 |
| US 5,063,685 | JP 3,202,316 |
| JP 2837483 | |


Further information

For further information relating to the installation of LM10 encoder system, see also the LM10 Data sheet (part no. LM10D01) and the Scale installation guide (part no. LM10D02). These can be downloaded from our website www.rls.si/LM10 and are also available from your local representative.



Disclaimer

Considerable effort has been made to ensure that the contents of this document are free from inaccuracies and omissions. However, RLS merilna tehnika d.o.o. makes no warranties with respect to the contents of this document and specifically disclaims any implied warranties. RLS merilna tehnika d.o.o. reserves the right to make changes to this document and to the product described herein without obligation to notify any person of such changes.



Storage and handling

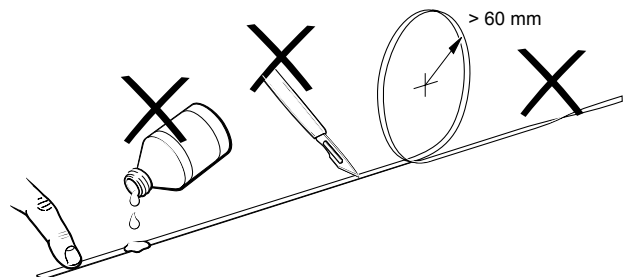

WARNING: The MS10 magnetic scale should not be exposed to magnetic flux densities higher than 50 mT on its surface. Magnetic fields higher than 50 mT can damage the scale.

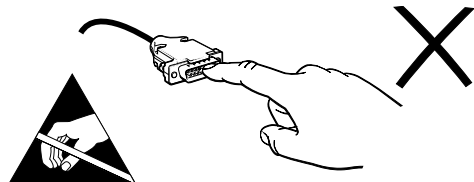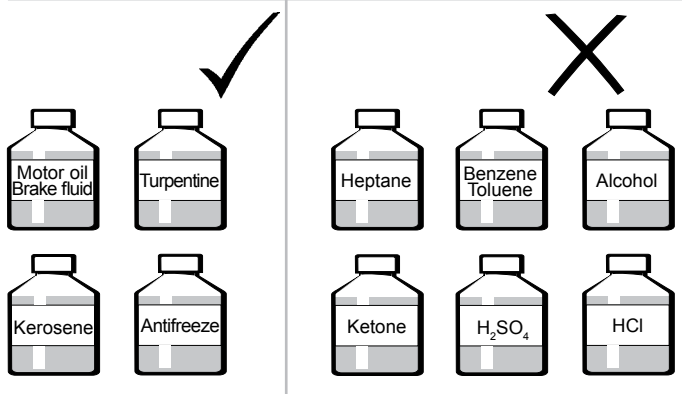

Storage and handling continued

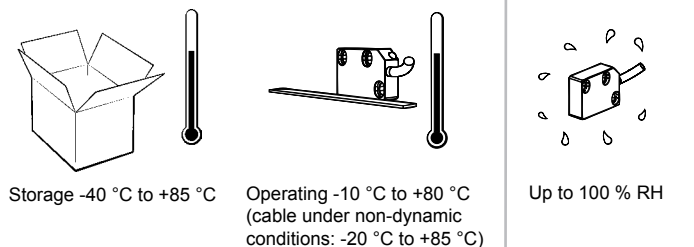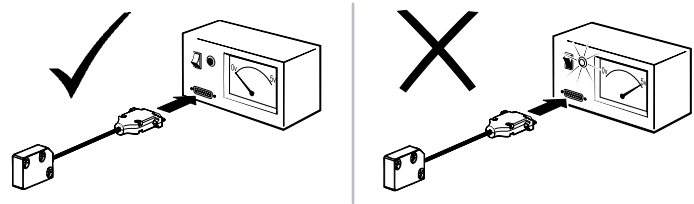

System description

The LM10 encoder system consists of an LM10 readhead on MS10 magnetic scale offering a range of industry standard digital and analogue output options.

Reference mark

The repeatable bi-directional reference signal can be provided in 3 ways.

- Stick-on reference mark.** The LM10 readhead should be ordered with the reference mark option. After installation of the scale a reference mark sticker can be applied to the scale at the required position using the reference mark applicator tool. Ensure that the reference sticker is oriented to the corresponding side of the readhead that has the reference mark detector installed.
- Selected at point of order.** The LM10 readhead should be ordered with the reference mark option. If required, the cover foil can be installed over the cut reference mark.
- Every 2 mm.** The LM10 readhead should be ordered with this specific mode activated only.


LED indicator

The LM10 set-up LED provides visual feedback of signal strength, error condition, for set-up and diagnostic use.

Green indicates good signal strength/set-up

Red indicates poor signal strength – adjustment required

NOTE: IB output type – LED flashes red.

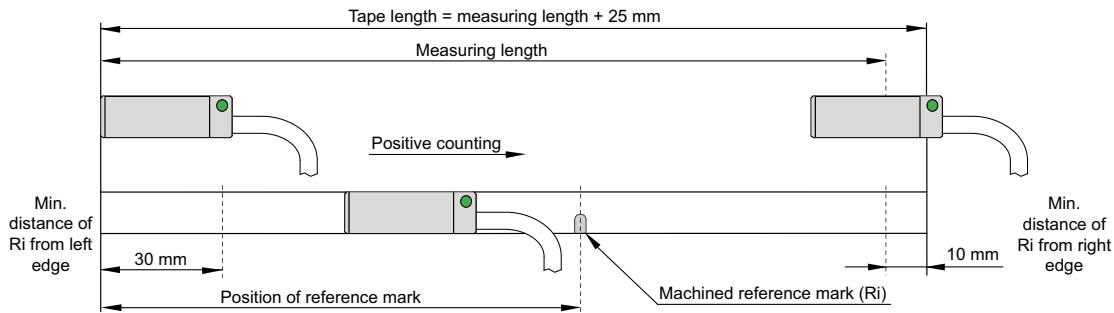

Scale installation


The LM10ASC00 scale guide is mounted in place of any RLS LM10 readhead and uses motion of the axis to apply MS10 tape scale parallel to the guideway – a one man, one hit operation.

1. Prepare scale and surface

- Ensure scale is cut to correct length and mounting surface has been cleaned and degreased.

2. Install the scale guide

- Mount the scale guide to the readhead bracket as shown.

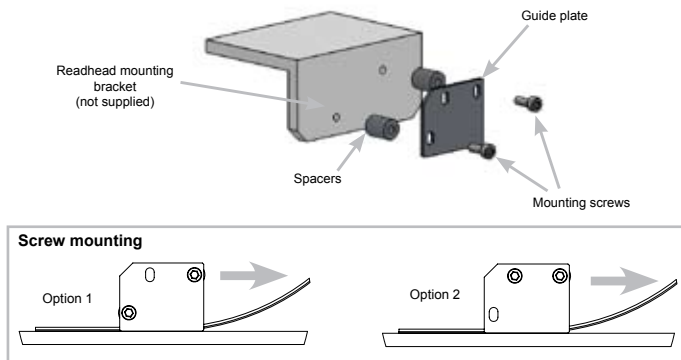

3. Load the scale into the scale guide

- Separate the backing paper from the first 40 mm of scale and feed it into the scale guide.
- Push the scale carefully through to the end of scale mark, ensuring that it does not stick to the mounting surface until it is in position

NOTE: To prevent the scale sticking to the mounting surface during this operation it may be necessary to re-apply approximately 20 mm of backing paper to the end of the scale before inserting through scale guide.

- Attach the end of the scale to the mounting surface with light finger pressure.

4. Apply the scale

- Traverse the axis through its full travel at a slow, steady speed.
- While moving the axis:
 - Apply a light finger pressure to the scale behind the scale guide to attach it to the mounting surface.
 - Gently pull the backing paper away from in front of the scale guide as it is separated.

5. Remove the scale guide

- When the axis has reached the limit of its travel, lock the axis in place and unbolt the scale guide from the readhead mounting bracket.

6. Ensure complete adhesion


- Apply firm finger pressure along the full length of the scale from the centre outwards to each end.

7. Apply cover foil (if used)


- Degrease the tape surface with alcohol.
- Install as per scale installation instructions in step 3 onwards.

Readhead installation

Once installed the readhead can be easily adjusted on the machine using the set-up LED indicator.



Green LED = good signal strength / set-up



Red LED = poor signal strength – adjustment required


A, B, A-, B- outputs become high impedance

NOTE: IB output type – LED flashes red.

Readheads can be ordered preset to the required resolution or provided so that they can be programmed as needed on the machine to the chosen resolution. This programming is carried out by connecting the readhead to a computer via a programming interface.


Stick-on reference mark installation

- Install scale (+ optional cover strip) – place the reference mark applicator tool on scale in the correct orientation/required position along the length.

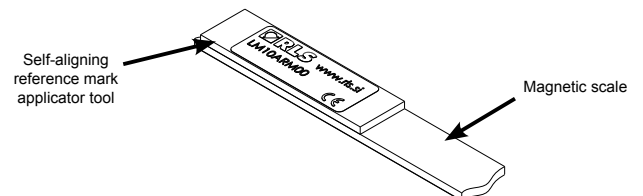


- Remove the backing tape from the reference mark sticker and carefully attach it to the surface of the scale by placing it against the end of the applicator tool.

NOTE: The correct orientation of reference mark is crucial. The mark on the sticker should be on the same side as the reference mark designators.

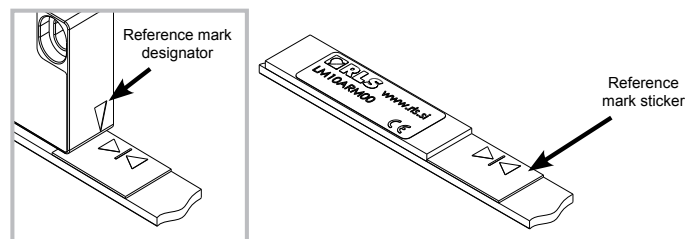


- Remove the applicator tool leaving the reference mark sticker in the desired position.



LM10 system dimensions


Dimensions and tolerances in mm.

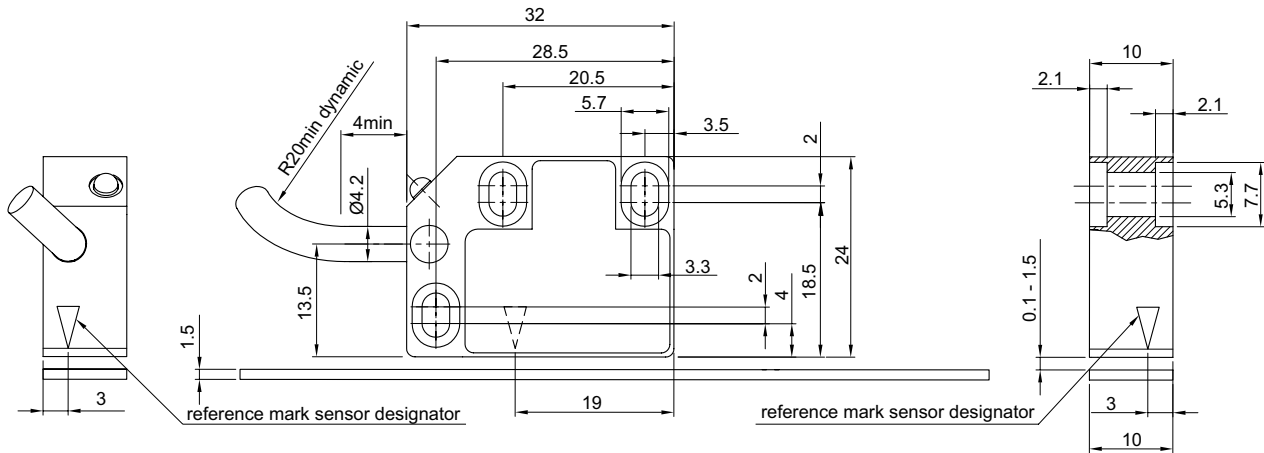


NOTE: Ensure recommended M3 readhead fixing screws are tightened to 0.5 Nm to 0.7 Nm.

Readhead installation tolerances


Ride height

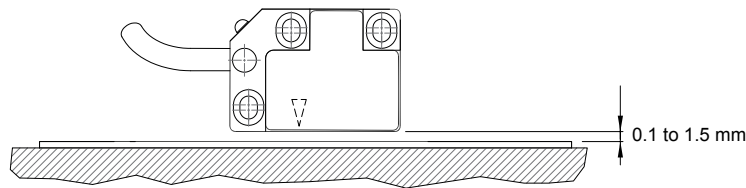


Pitch

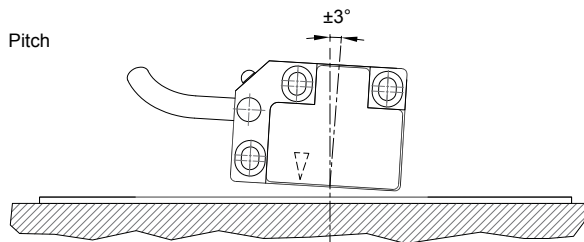


Yaw

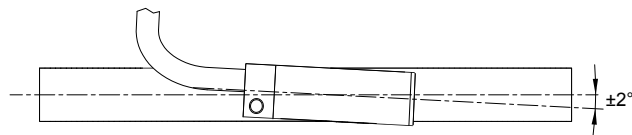

Lateral offset



Roll




General specifications

| | |
|---|--|
| Power supply | 4.5 V to 7 V – reverse polarity protected; voltage on readhead (see note below) |
| Power consumption (without any load) | < 30 mA for digital output type < 50 mA for analogue output type |
| Environmental sealing | IP68 (according to IEC 60529) |
| Temperature | Operating -10 °C to +80 °C (cable under non-dynamic conditions: -20 °C to +85 °C) Storage -40 °C to +85 °C |
| Shock | 300 m/s ² , 11 ms (IEC 60068-2-27) |
| Vibration | 300 m/s ² , 55 Hz to 2000 Hz (IEC 60068-2-6) |
| Mass | Readhead (1 m cable, no connector) 56.4 g, Magnetic scale (1 m) 60 g, Cover foil (1 m) 3.5 g |
| Cable | PUR high flexible cable, drag-chain compatible, double-shielded 8 × 0.05 mm ² ; durability: 20 million cycles at 20 mm bend radius |

NOTE: Voltage drop over cable; 13 mV/m – without load, 54 mV/m – with 120 Ω load

Electrical connections

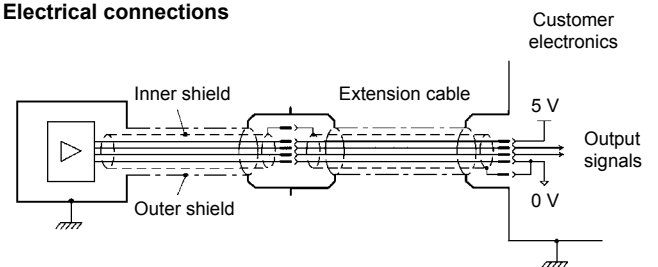


Connections for digital outputs (Open Collector NPN)


| Function | Signal | Colour | 9 pin D type male (option A) |
|---------------------|--------|--------------|------------------------------|
| Power | 5 V | Brown | 5 |
| | 0 V | White | 9 |
| Incremental signals | A | Green | 4 |
| | B | Blue | 3 |
| Reference mark | Z | Pink | 2 |
| Shield | Inner | Green/Yellow | 1, 9 |
| | Outer | - | Case |

Timing diagram

Complementary signals not shown

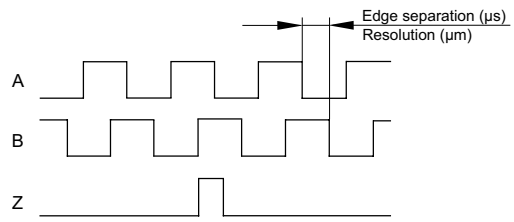

Recommended signal termination

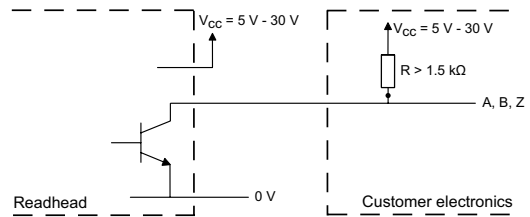


Connections for digital outputs (RS422)


| Function | Signal | Colour | 15 pin D type male (option D) | 9 pin D type male (option A) |
|---------------------|--------|--------------|-------------------------------|------------------------------|
| Power | 5 V | Brown | 7 | 5 |
| | 0 V | White | 2 | 9 |
| Incremental signals | A | Green | 14 | 4 |
| | A- | Yellow | 6 | 8 |
| | B | Blue | 13 | 3 |
| Reference mark | Z | Pink | 12 | 2 |
| | Z- | Grey | 4 | 6 |
| Shield | Inner | Green/Yellow | 15 | 1, 9 |
| | Outer | - | Case | Case |

Timing diagram

Complementary signals not shown

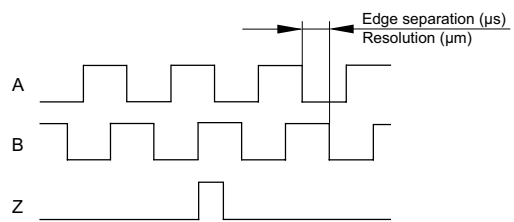


Recommended signal termination

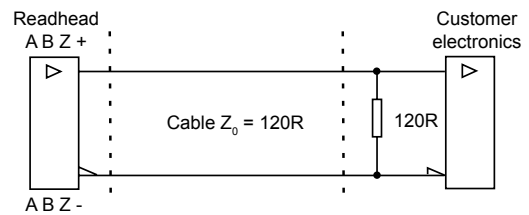


Connections for analogue outputs (1 V_{pp})

| Function | Signal | Colour | 15 pin D type male (option L) | 9 pin D type male (option A) |
|---------------------|-----------------------------|--------|-------------------------------|------------------------------|
| Power | 5 V | Brown | 4, 5 | 5 |
| | 0 V | White | 12, 13 | 1 |
| Incremental signals | V ₁ | Green | 9 | 2 |
| | V ₁ ⁻ | Yellow | 1 | 6 |
| | V ₂ | Blue | 10 | 4 |
| | V ₂ ⁻ | Red | 2 | 8 |
| Reference mark | V ₀ | Pink | 3 | 3 |
| | V ₀ ⁻ | Grey | 11 | 7 |
| Shield | Inner | - | 15 | 9 |
| | Outer | - | Case | Case |

Timing diagram

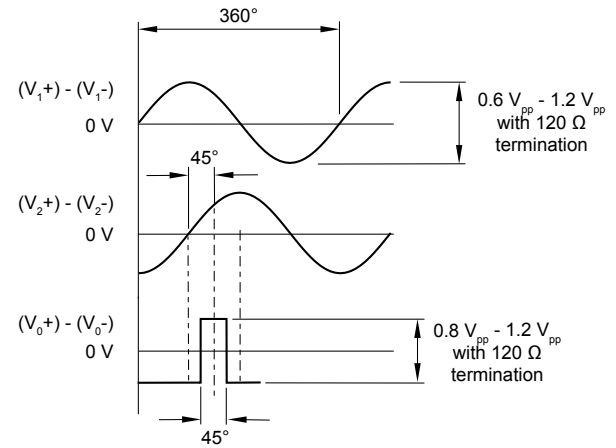


Recommended signal termination



Connections for analogue outputs (12 μA)

| Function | Signal | Colour | 9 pin D type male (option A) |
|---------------------|-----------------------------|--------|------------------------------|
| Power | 5 V | Brown | 5 |
| | 0 V | White | 1 |
| Incremental signals | I ₁ | Green | 2 |
| | I ₁ ⁻ | Yellow | 6 |
| | I ₂ | Blue | 4 |
| | I ₂ ⁻ | Red | 8 |
| Reference mark | I ₀ | Pink | 3 |
| | I ₀ ⁻ | Grey | 7 |
| Shield | Inner | - | 9 |
| | Outer | - | Case |

Timing diagram

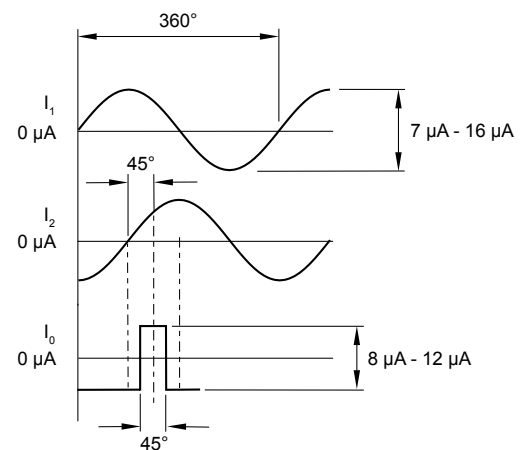

SALES & SERVICE:

A Tech Authority, Inc.
 13745 Stockton Ave.
 Chino CA 91710
 909-614-4522
 sales@atechauthority.com